



200N2U6D32

WHEEL Ø 200 MM SERIES N2U6 DOUBLE BALL BEARING

WHEEL

wheel diameter in mm	200
wheel width in mm	48
hub width in mm	59
screw size	M12
tread	thermopl. polyurethane 95° shore A red
wheel center	polyamide grey
bearing	double ball bearing
threadguard	small nylon threadguard
temperature range	-40°C to +80°C



HOUSING

material thickness fitting in mm	
material thickness fork in mm	
fitting	
mounting dimension in mm	
offset dimension in mm	0
total height in mm	
swivel radius in mm	0
dyn. load capacity in kg	350
test norm	DIN EN 12532





CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

200N2U6D32

WHEEL Ø 200 MM SERIES N2U6 DOUBLE BALL BEARING

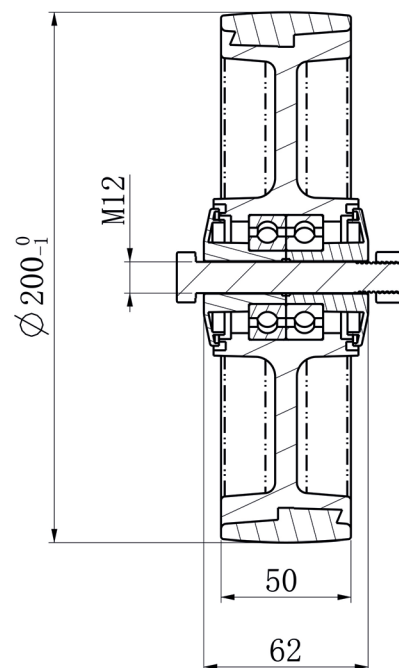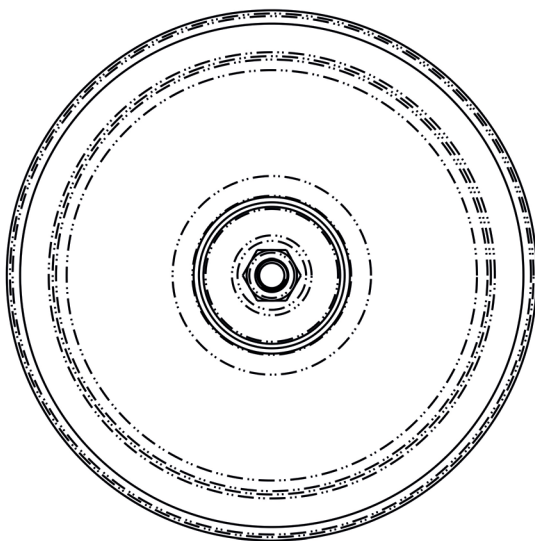

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu