

BAH15C0100P2T2P0N

BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2T2 PLAIN BEARING

WHEEL

wheel diameter in mm	100
wheel width in mm	32
hub width in mm	36
screw size	M8
tread	thermopl. rubber 95° shore A grey
wheel center	polypropylene grey
bearing	plain bearing
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING




material thickness fitting in mm	2.50
material thickness fork in mm	2.50
fitting	bolt hole
mounting dimension in mm	11
offset dimension in mm	37
total height in mm	135
swivel radius in mm	132
dyn. load capacity in kg	100
test norm	DIN EN 12530

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

BAH15C0100P2T2P0N

BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2T2 PLAIN BEARING

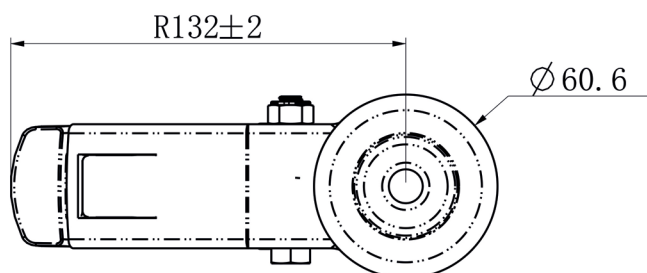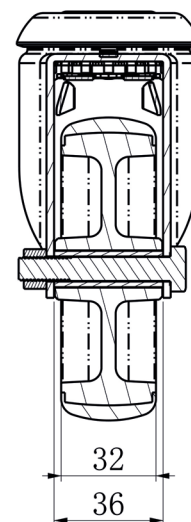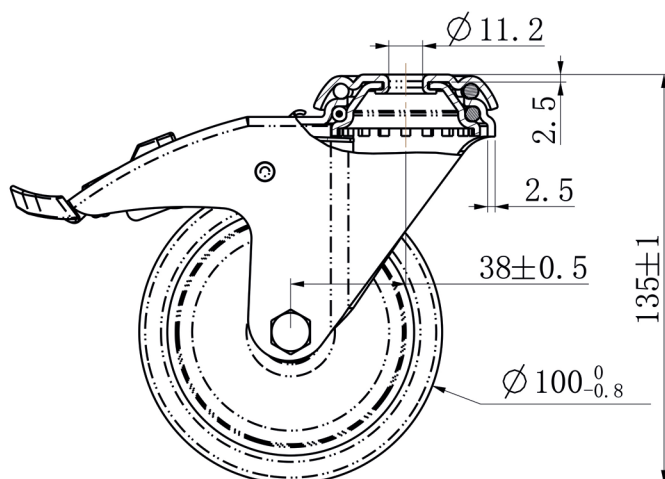

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu