

BBH35WC100P0P0P0N

## BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P0P0 PLAIN BEARING

### WHEEL

|                      |                              |
|----------------------|------------------------------|
| wheel diameter in mm | 100                          |
| wheel width in mm    | 36                           |
| hub width in mm      | 40                           |
| screw size           | M8                           |
| tread                | polypropylene white          |
| wheel center         | polypropylene white          |
| bearing              | plain bearing                |
| threadguard          | without separate threadguard |
| temperature range    | -20°C to +60°C               |



### HOUSING


|                                  |              |
|----------------------------------|--------------|
| material thickness fitting in mm | 2.50         |
| material thickness fork in mm    | 2.50         |
| fitting                          | bolt hole    |
| mounting dimension in mm         | 13           |
| offset dimension in mm           | 40           |
| total height in mm               | 124          |
| swivel radius in mm              | 127          |
| dyn. load capacity in kg         | 100          |
| test norm                        | DIN EN 12532 |

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

BBH35WC100P0P0P0N

## BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P0P0 PLAIN BEARING

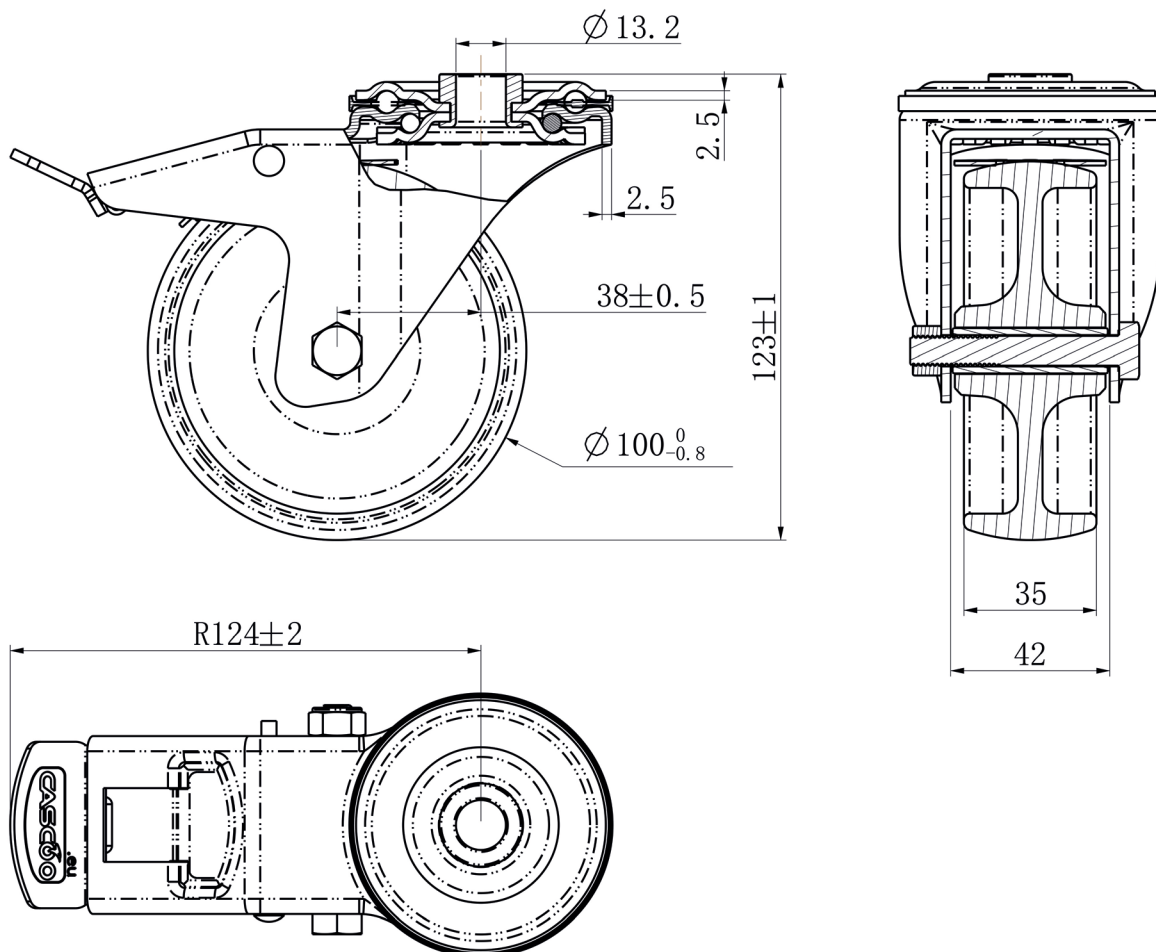

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu