

BIH36SC080P2W2L0N

BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 80 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

WHEEL

wheel diameter in mm	80
wheel width in mm	30
hub width in mm	40
screw size	M8
tread	thermopl. rubber 95° shore A grey
wheel center	polypropylene grey
bearing	plain bearing stainless steel
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING


material thickness fitting in mm	2.50
material thickness fork in mm	2.00
fitting	bolt hole
mounting dimension in mm	13
offset dimension in mm	36
total height in mm	106
swivel radius in mm	115
dyn. load capacity in kg	80
test norm	DIN EN 12532

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

BIH36SC080P2W2L0N

BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 80 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

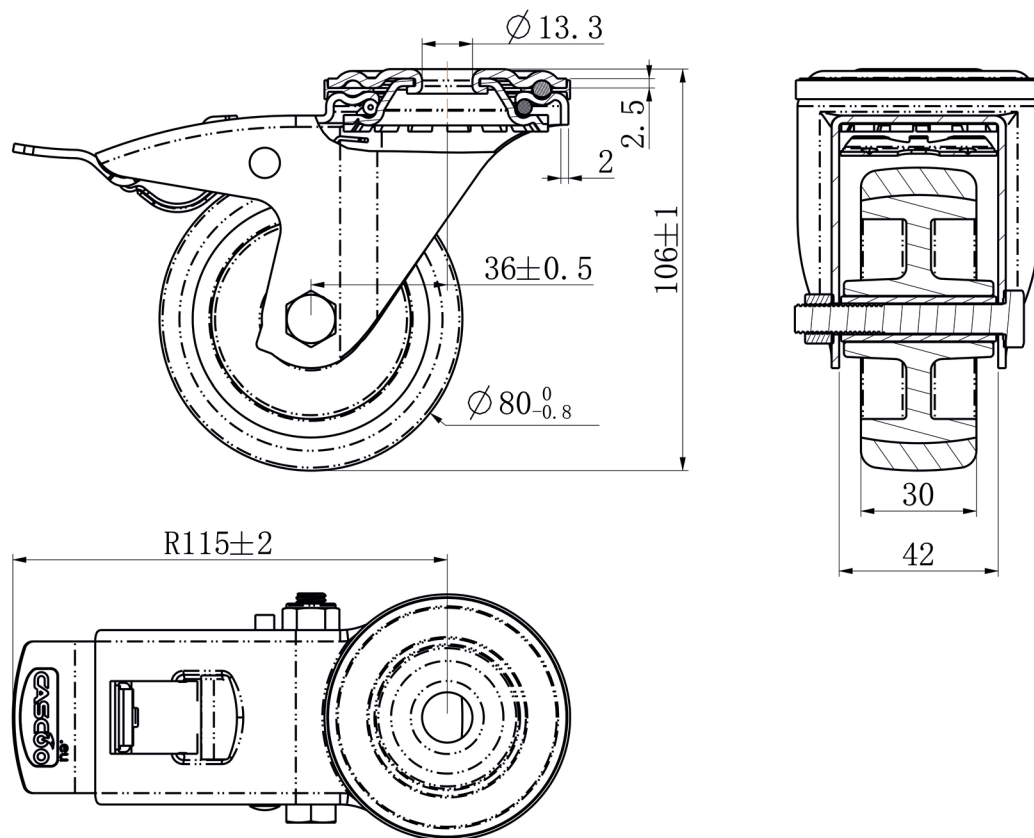

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu