

BIH36SC100P2W2L0N

## BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

### WHEEL

|                      |                                   |
|----------------------|-----------------------------------|
| wheel diameter in mm | 100                               |
| wheel width in mm    | 32                                |
| hub width in mm      | 40                                |
| screw size           | M8                                |
| tread                | thermopl. rubber 95° shore A grey |
| wheel center         | polypropylene grey                |
| bearing              | plain bearing stainless steel     |
| threadguard          | without separate threadguard      |
| temperature range    | -20°C to +60°C                    |



### HOUSING


|                                  |              |
|----------------------------------|--------------|
| material thickness fitting in mm | 2.50         |
| material thickness fork in mm    | 2.00         |
| fitting                          | bolt hole    |
| mounting dimension in mm         | 13           |
| offset dimension in mm           | 36           |
| total height in mm               | 126          |
| swivel radius in mm              | 115          |
| dyn. load capacity in kg         | 100          |
| test norm                        | DIN EN 12532 |

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

BIH36SC100P2W2L0N

## BOLT HOLE SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

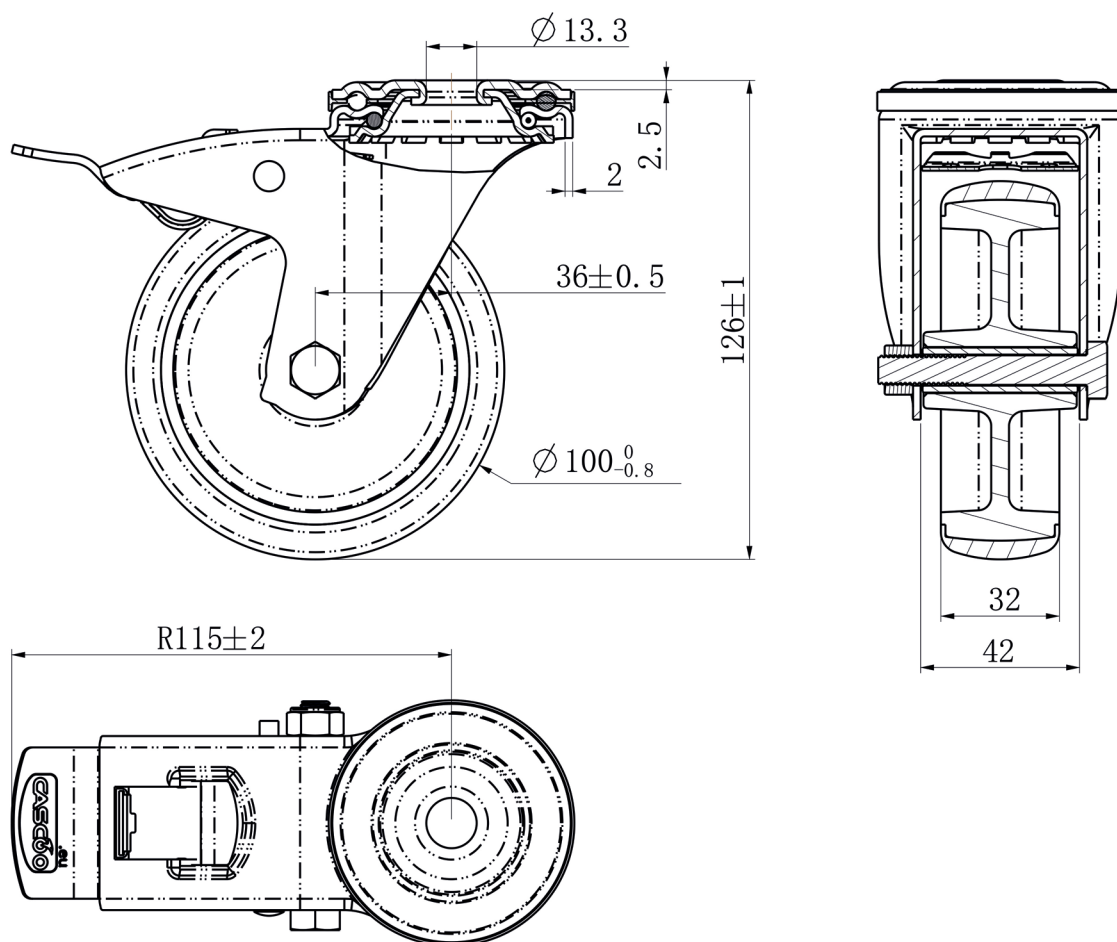

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu