



HAH12C0075P4P4P0N

## BOLT HOLE SWIVEL CASTOR Ø 75 MM SERIES P4P4 PLAIN BEARING

### WHEEL

|                      |                              |
|----------------------|------------------------------|
| wheel diameter in mm | 75                           |
| wheel width in mm    | 23                           |
| hub width in mm      | 28                           |
| screw size           | M6                           |
| tread                | polypropylene black          |
| wheel center         | polypropylene black          |
| bearing              | plain bearing                |
| threadguard          | without separate threadguard |
| temperature range    | -20°C to +60°C               |



### HOUSING


|                                  |              |
|----------------------------------|--------------|
| material thickness fitting in mm | 2.00         |
| material thickness fork in mm    | 2.00         |
| fitting                          | bolt hole    |
| mounting dimension in mm         | 11           |
| offset dimension in mm           | 25           |
| total height in mm               | 100          |
| swivel radius in mm              | 0            |
| dyn. load capacity in kg         | 30           |
| test norm                        | DIN EN 12530 |

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

HAH12C0075P4P4P0N

## BOLT HOLE SWIVEL CASTOR Ø 75 MM SERIES P4P4 PLAIN BEARING

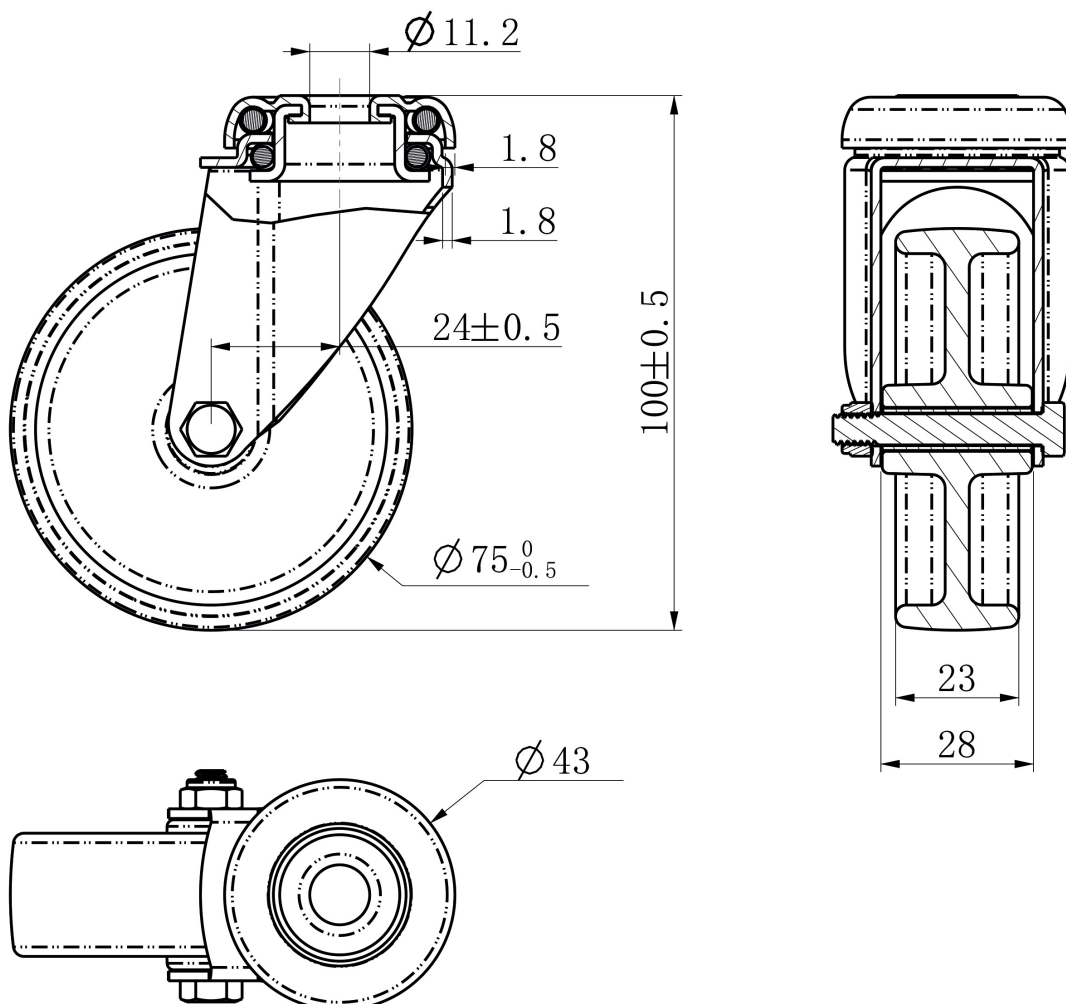

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu