

SAPE5C0100P2T2P0N

SWIVEL CASTOR Ø 100 MM SERIES P2T2 PLAIN BEARING

WHEEL

wheel diameter in mm	100
wheel width in mm	32
hub width in mm	36
screw size	M8
tread	thermopl. rubber 95° shore A grey
wheel center	polypropylene grey
bearing	plain bearing
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING




material thickness fitting in mm	2.50
material thickness fork in mm	2.50
fitting	plate
mounting dimension in mm	61.5 / 56 x 51.5 / 46.5
offset dimension in mm	37
total height in mm	135
swivel radius in mm	0
dyn. load capacity in kg	100
test norm	DIN EN 12530

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

SAPE5C0100P2T2P0N

SWIVEL CASTOR Ø 100 MM SERIES P2T2 PLAIN BEARING

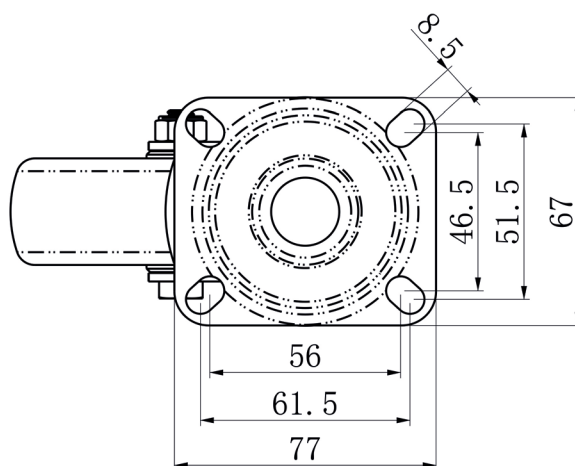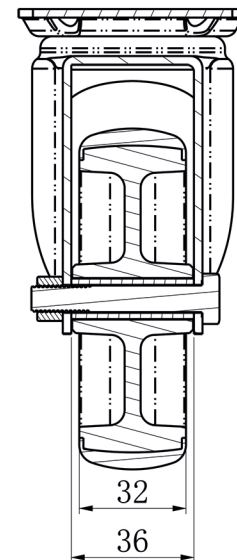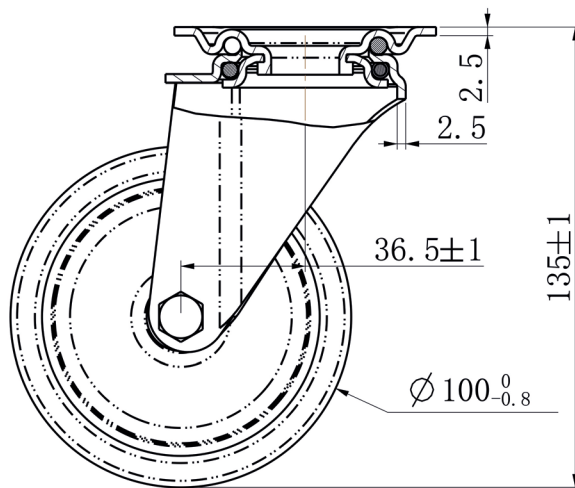

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu