

SIP26SC080P2W2L0N

SWIVEL CASTOR Ø 80 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

WHEEL

wheel diameter in mm	80
wheel width in mm	30
hub width in mm	40
screw size	M8
tread	thermopl. rubber 95° shore A grey
wheel center	polypropylene grey
bearing	plain bearing stainless steel
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING




material thickness fitting in mm	2.50
material thickness fork in mm	2.00
fitting	plate
mounting dimension in mm	80 / 77 x 60
offset dimension in mm	36
total height in mm	108
swivel radius in mm	0
dyn. load capacity in kg	80
test norm	DIN EN 12532

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

SIP26SC080P2W2L0N

SWIVEL CASTOR Ø 80 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

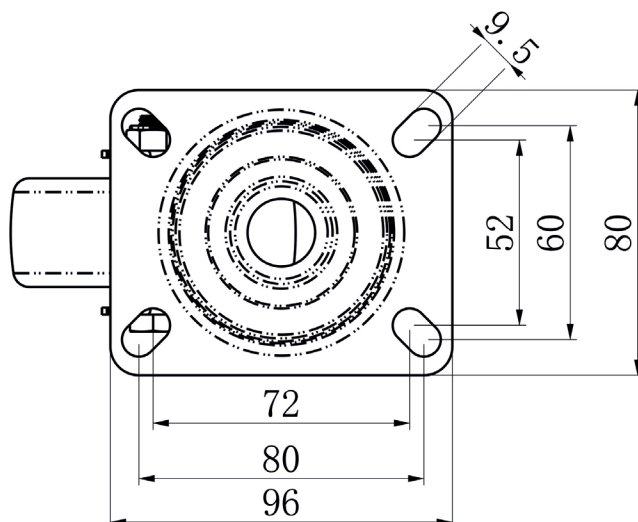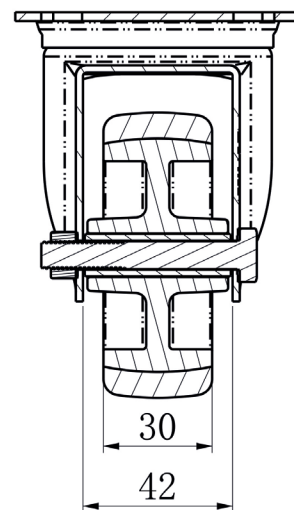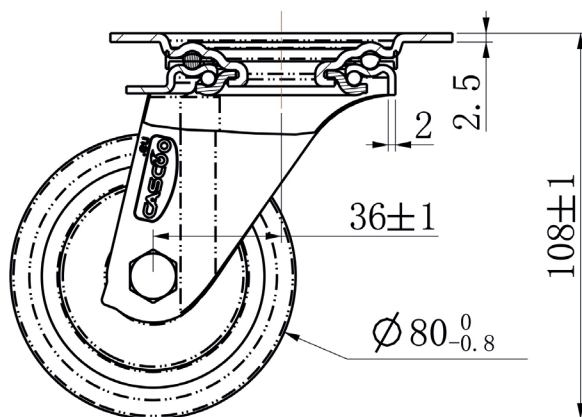

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu