

TAPE5C0100P2T2B42

## SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2T2 BALL BEARING

### WHEEL

|                      |                                   |
|----------------------|-----------------------------------|
| wheel diameter in mm | 100                               |
| wheel width in mm    | 32                                |
| hub width in mm      | 36                                |
| screw size           | M8                                |
| tread                | thermopl. rubber 95° shore A grey |
| wheel center         | polypropylene grey                |
| bearing              | ball bearing                      |
| threadguard          | full covering plastic threadguard |
| temperature range    | -20°C to +60°C                    |



### HOUSING

|                                  |                         |
|----------------------------------|-------------------------|
| material thickness fitting in mm | 2.50                    |
| material thickness fork in mm    | 2.50                    |
| fitting                          | plate                   |
| mounting dimension in mm         | 61.5 / 56 x 51.5 / 46.5 |
| offset dimension in mm           | 37                      |
| total height in mm               | 135                     |
| swivel radius in mm              | 132                     |
| dyn. load capacity in kg         | 100                     |
| test norm                        | DIN EN 12530            |




**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

TAPE5C0100P2T2B42

## SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2T2 BALL BEARING

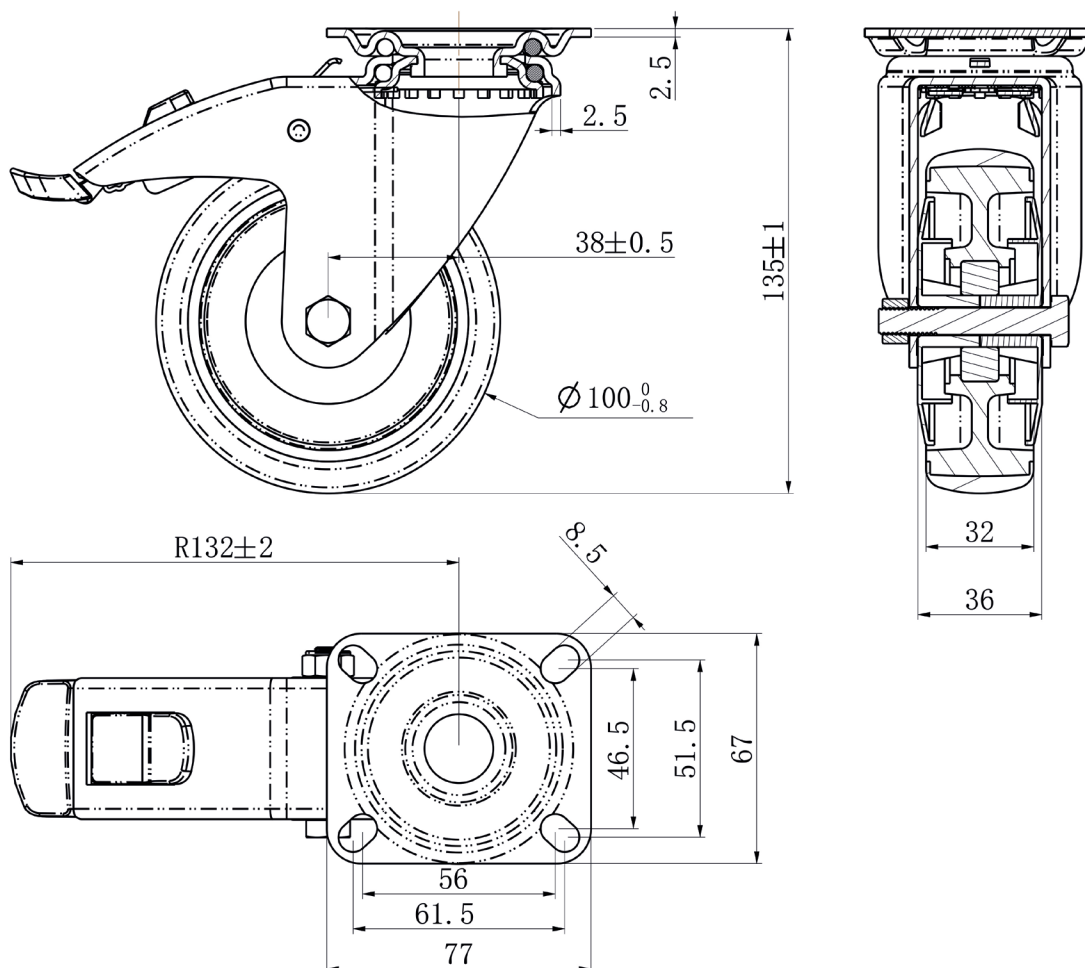

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu