

TBP25WC080N2U6R1W

## SWIVEL CASTOR WITH TOTAL BRAKE Ø 80 MM SERIES N2U6 ROLLER BEARING

### WHEEL

|                      |                                           |
|----------------------|-------------------------------------------|
| wheel diameter in mm | 80                                        |
| wheel width in mm    | 32                                        |
| hub width in mm      | 40                                        |
| screw size           | M8                                        |
| tread                | thermopl. polyurethane 95° shore A<br>red |
| wheel center         | polyamide grey                            |
| bearing              | roller bearing                            |
| threadguard          | small metal threadguard                   |
| temperature range    | -40°C to +80°C                            |



### HOUSING

|                                  |              |
|----------------------------------|--------------|
| material thickness fitting in mm | 2.50         |
| material thickness fork in mm    | 2.50         |
| fitting                          | plate        |
| mounting dimension in mm         | 80 / 77 x 60 |
| offset dimension in mm           | 40           |
| total height in mm               | 105          |
| swivel radius in mm              | 127          |
| dyn. load capacity in kg         | 130          |
| test norm                        | DIN EN 12532 |




**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

TBP25WC080N2U6R1W

# SWIVEL CASTOR WITH TOTAL BRAKE Ø 80 MM SERIES N2U6 ROLLER BEARING

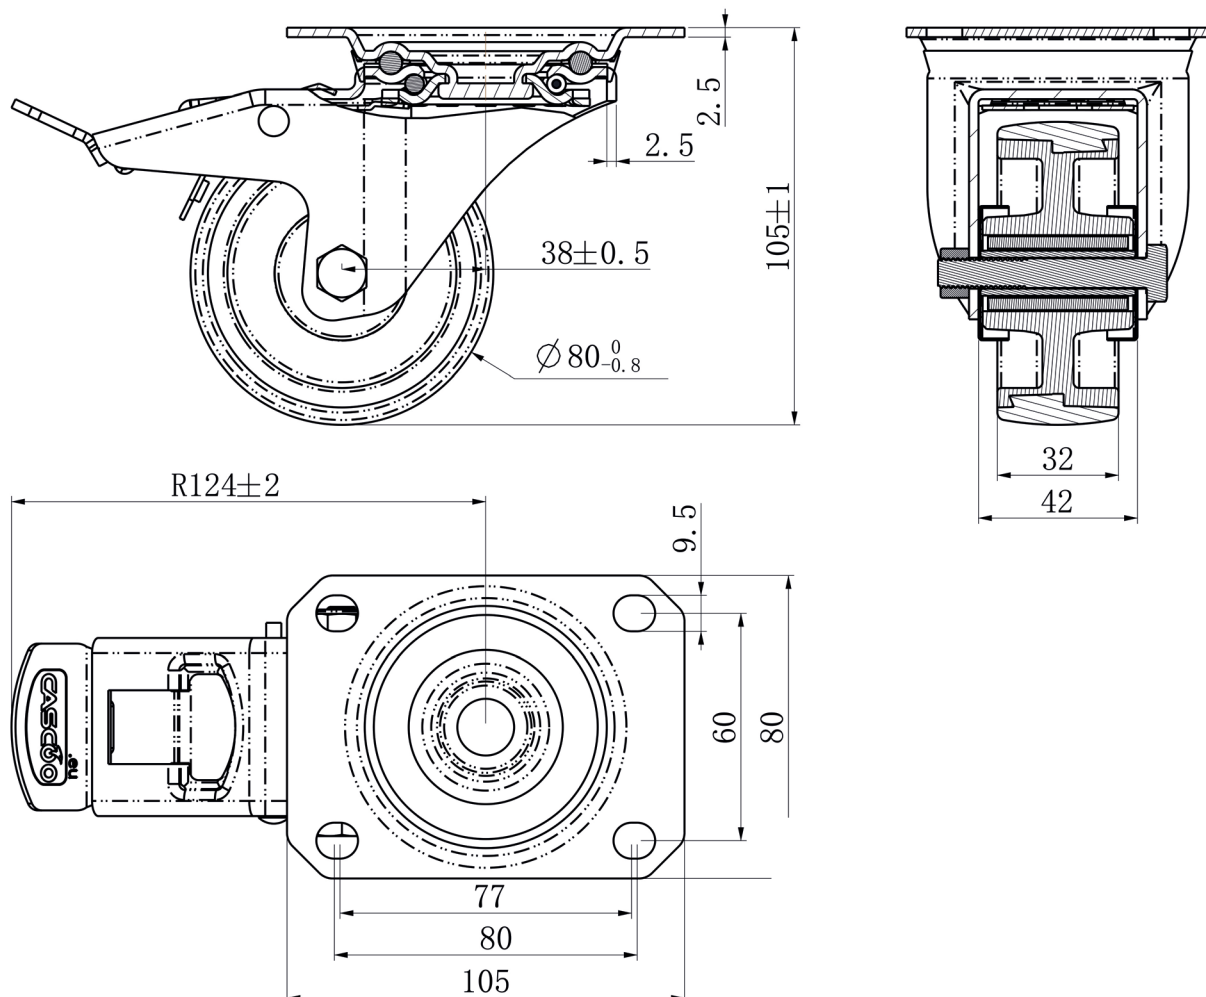

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu