

TBP25WC100P0P0P0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P0P0 PLAIN BEARING

WHEEL

wheel diameter in mm	100
wheel width in mm	36
hub width in mm	40
screw size	M8
tread	polypropylene white
wheel center	polypropylene white
bearing	plain bearing
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING




material thickness fitting in mm	2.50
material thickness fork in mm	2.50
fitting	plate
mounting dimension in mm	80 / 77 x 60
offset dimension in mm	40
total height in mm	125
swivel radius in mm	127
dyn. load capacity in kg	100
test norm	DIN EN 12532

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

TBP25WC100P0P0P0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P0P0 PLAIN BEARING

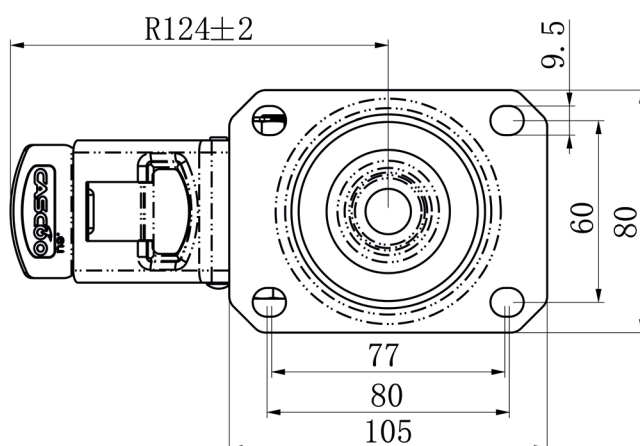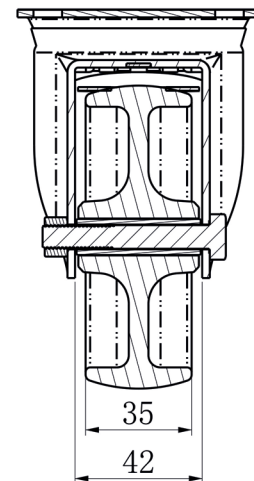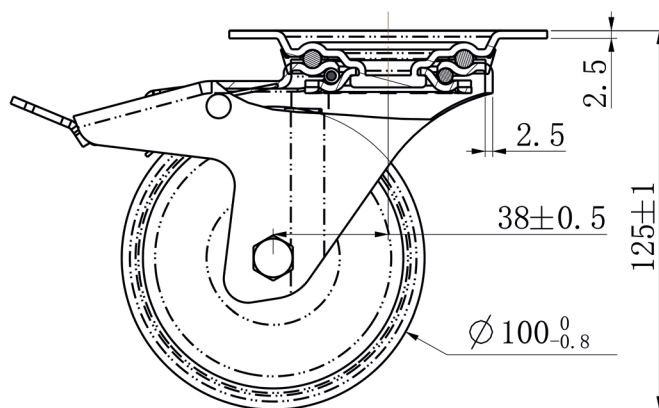

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu