

TBP25WC100P4S4R0NA

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P4S4 (ANTISTATIC) ROLLER BEARING

WHEEL

wheel diameter in mm	100
wheel width in mm	32
hub width in mm	40
screw size	M8
tread	solid rubber 85° shore A black, anti-static
wheel center	polypropylene black, antistatic
bearing	roller bearing
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING


material thickness fitting in mm	2.50
material thickness fork in mm	2.50
fitting	plate
mounting dimension in mm	80 / 77 x 60
offset dimension in mm	40
total height in mm	125
swivel radius in mm	127
dyn. load capacity in kg	50
test norm	DIN EN 12532

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

TBP25WC100P4S4R0NA

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P4S4 (ANTISTATIC) ROLLER BEARING

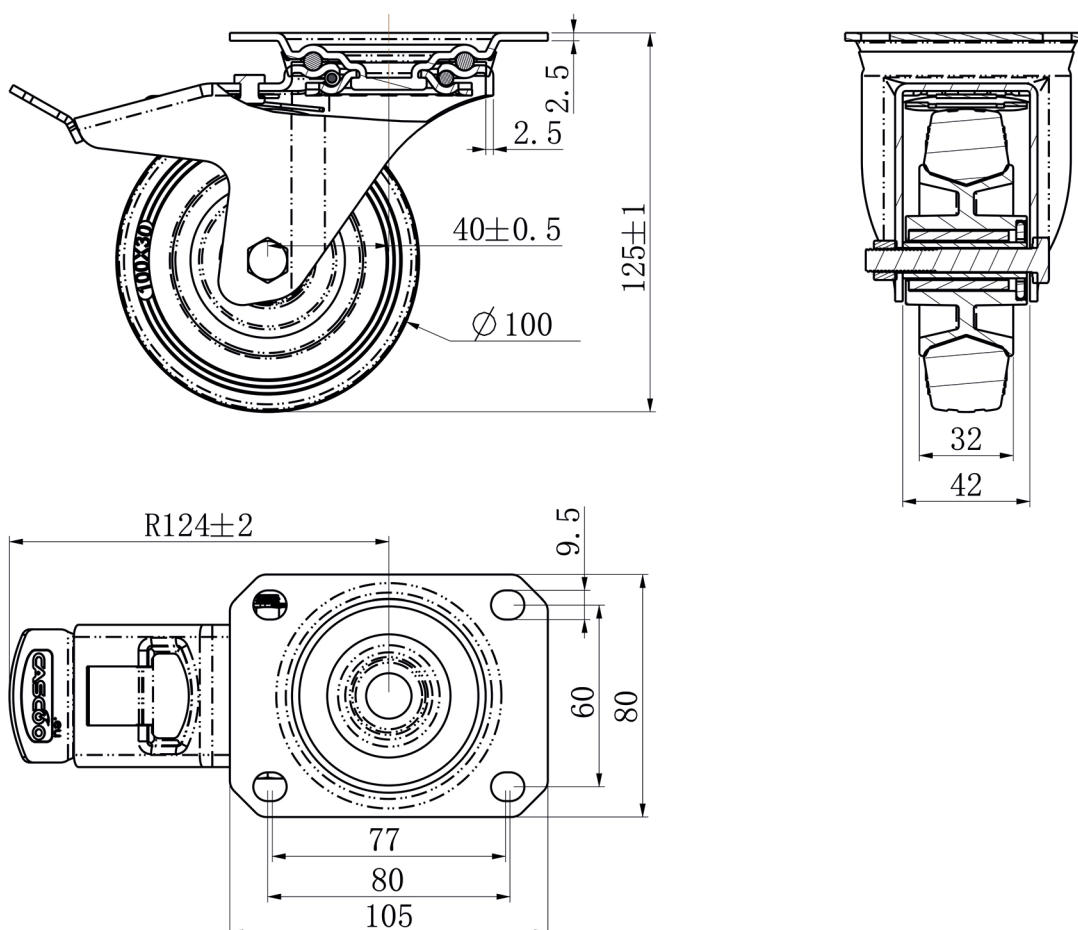

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu