

TIP26SC100P2W2L0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

WHEEL

wheel diameter in mm	100
wheel width in mm	32
hub width in mm	40
screw size	M8
tread	thermopl. rubber 95° shore A grey
wheel center	polypropylene grey
bearing	plain bearing stainless steel
threadguard	without separate threadguard
temperature range	-20°C to +60°C



HOUSING


material thickness fitting in mm	2.50
material thickness fork in mm	2.00
fitting	plate
mounting dimension in mm	80 / 77 x 60
offset dimension in mm	36
total height in mm	128
swivel radius in mm	115
dyn. load capacity in kg	100
test norm	DIN EN 12532

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

TIP26SC100P2W2L0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES P2W2 PLAIN BEARING STAINLESS STEEL

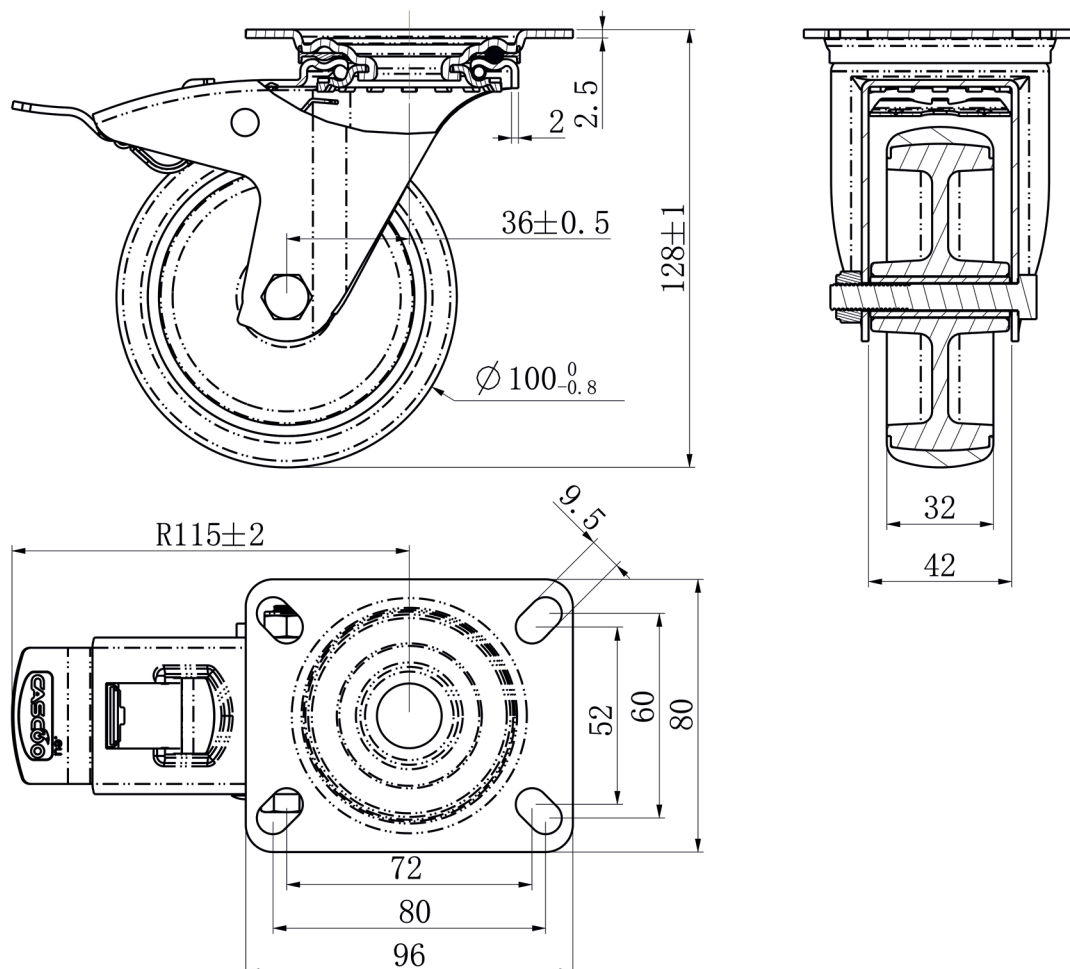

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu