

TPP21WC100C4C4P0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES C4C4 PLAIN BEARING

WHEEL

wheel diameter in mm	100
wheel width in mm	36
hub width in mm	40
screw size	M8
tread	polyamide with fiberglass black
wheel center	polyamide with fiberglass black
bearing	plain bearing
threadguard	without separate threadguard
temperature range	-20°C to +280°C



HOUSING

material thickness fitting in mm	3.00
material thickness fork in mm	2.50
fitting	plate
mounting dimension in mm	80 / 77 x 60
offset dimension in mm	40
total height in mm	128
swivel radius in mm	124
dyn. load capacity in kg	100
test norm	DIN EN 12532




CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

TPP21WC100C4C4P0N

SWIVEL CASTOR WITH TOTAL BRAKE Ø 100 MM SERIES C4C4 PLAIN BEARING

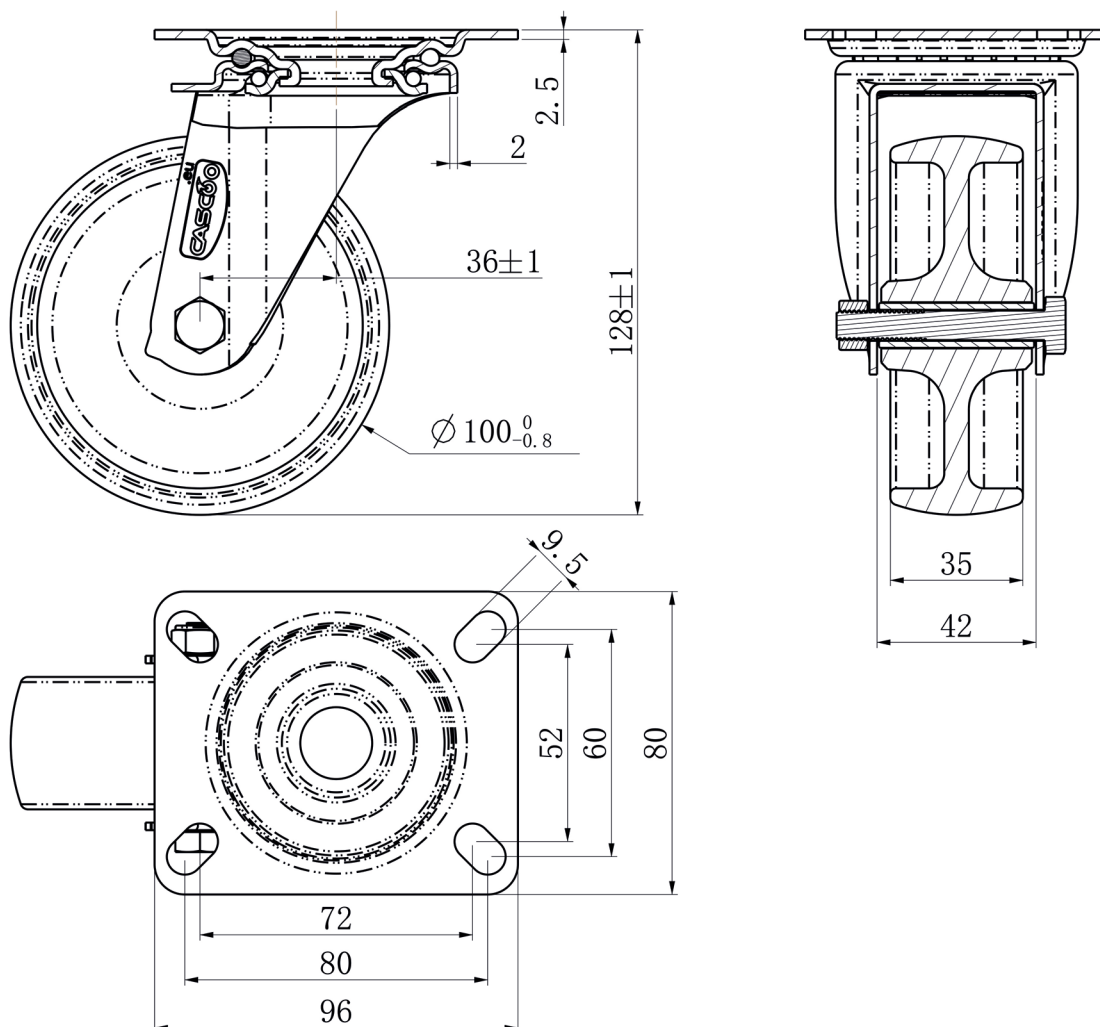

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu