

TPP57WC200N2U6D32

SWIVEL CASTOR WITH TOTAL BRAKE Ø 200 MM SERIES N2U6 DOUBLE BALL BEARING

WHEEL

wheel diameter in mm	200
wheel width in mm	48
hub width in mm	59
screw size	M12
tread	thermopl. polyurethane 95° shore A red
wheel center	polyamide grey
bearing	double ball bearing
threadguard	small nylon threadguard
temperature range	-40°C to +80°C



HOUSING

material thickness fitting in mm	4.00
material thickness fork in mm	3.00
fitting	plate
mounting dimension in mm	105 x 84 / 76
offset dimension in mm	55
total height in mm	235
swivel radius in mm	165
dyn. load capacity in kg	350
test norm	DIN EN 12532




CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu

TPP57WC200N2U6D32

SWIVEL CASTOR WITH TOTAL BRAKE Ø 200 MM SERIES N2U6 DOUBLE BALL BEARING

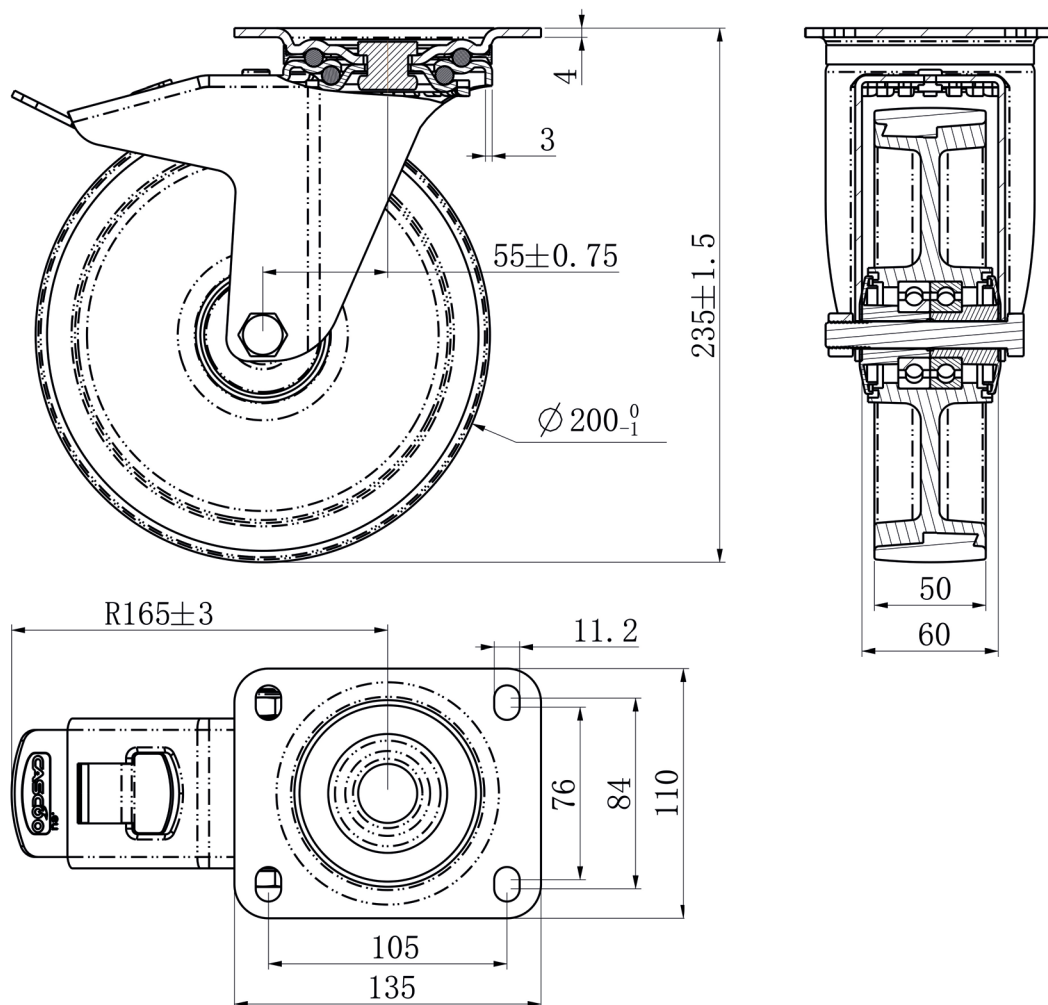

CASCOO Europe GmbH

Lütke Haar 15 • 59602 Rüthen • Germany
+49 2952 - 970629-0
info@cascoo.eu • www.cascoo.eu